

DURABLE IMPACT PROTECTION WITH CUT RESISTANCE

A flexible and extreme handling impact resistant glove with TPR protection zones giving great grip in wet, oily and dry conditions. Provides high cut protection allowing heavy duty works to be carried out safely.

FEATURES

- › Cut resistant: Level F / ANSI A7
- › A robust single-piece synthetic material palm for heightened durability and anti-slip grip
- › Durable multi-layer fabric on the palm provides high cut and abrasion resistance
- › Continuous impact panel for full coverage protection
- › Contact Heat Resistant up to 250°C/482°F
- › Neoprene cuff resists snagging and offers a comfortable and secure fit around the wrist
- › Double-stitched Kevlar(R) thread to bolster high wear areas
- › Anatomically curved finger design helps prevent hand fatigue
- › Pull tab with ID tag



OIL GRIP



SUITABLE FOR


Typical Industries

- Construction
- Metal Fabrication
- Mining
- Oil and Gas
- Transportation

Suitable Applications

- Assembly
- Cargo handling
- Demolition
- Drilling
- Heavy construction
- Mining extraction

CERTIFICATION

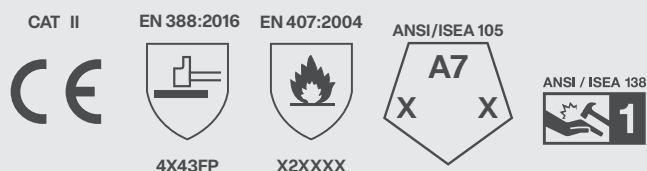

See overleaf for explanation

PRODUCTION INFORMATION

MATERIALS	LINER:	Polyester Fabric Laminated Spandex with TPR
	COATING:	Synthetic leather with red ARMORTEX abrasion resistant fabric and knitted cut resistant fabric
COLOUR	Yellow/Black/Red	
LENGTH (mm)	250 (Size Dependent)	
CUFF STYLE	Loose neoprene cuff	

ORDERING DETAILS

SIZE	CODE	PACKAGING
8/M	SKG00020CF	10 pairs per bag
9/L	SKG00020CH	
10/XL	SKG00020CJ	
11/XXL	SKG00020CL	60 pairs per case
12/XXXL	SKG00020CN	
13/XXXXL	SKG00020CP	


RECOMMENDATIONS FOR USE

- USE: General handling glove with cut and impact protection. Not suitable for high contact heat (beyond 250°C / 608°F), electrical and chemical protection. Do not use near moving machines if there is a risk of entanglement
- STORAGE: Store in dry conditions in the original packaging and away from direct sunlight
- CLEANING: To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present
- LIFETIME: Service life depends on the glove application and therefore cannot be specified. It is the responsibility of the user to ensure the glove is suitable for its intended use

CERTIFICATION LEGENDS



MECHANICAL HAZARDS EN 388:2016
PERFORMANCE LEVELS*

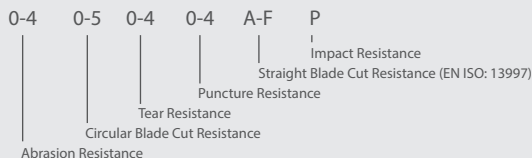

*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter

CLASSIFICATION FOR CUT RESISTANCE

Measured breakthrough time	Permeation performance index (grams)
A1	≥ 200
A2	≥ 500
A3	≥ 1000
A4	≥ 1500
A5	≥ 2200
A6	≥ 3000
A7	≥ 4000
A8	≥ 5000
A9	> 6000

CLASSIFICATION FOR IMPACT RESISTANCE

Performance level	Mean (kJ)	All impacts (kJ)
1	≤ 9	< 11.3
2	≤ 6.5	≤ 8.1
3	≤ 4	≤ 5

GLOBUS

EUROPE

www.globusgroup.com

E: sales@globus.co.uk

T: +44 (0)161 877 4747

F: +44 (0)161 877 4746

MIDDLE EAST & AFRICA

www.globusgroup.com/gcc

E: gcc@globusgroup.com

T: +971 4 882 9962

F: +971 4 882 9963

GLOBUS AMERICAS

www.globusgroup.com

E: americas@globusgroup.com

Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM
Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES
Globus Americas LLC, 45 Rockefeller Plaza, Suite 2000, New York City, New York, 10111, USA

EU compliance certificate delivered by the notified body INTERTEK ITALIA SPA, Via Guido Miglioli, 2/A - 20063 Cernusco sul Naviglio (MI) - Italia (Notified Body No. 2575)
UKCA compliance certificate delivered by the notified body ITS Testing Services UK Ltd, Centre Court, Meridian Business Park, Leicester, LE19 1WD, United Kingdom (Approved Body No. 0362)

The descriptions, characteristics, applications and photos are given for information purposes and do not constitute a contractual commitment. The manufacturer reserves the right to make any modifications it deems necessary.